

SRC065 – 65 lb Gourmet Clear Ice Machine

Brilliance™ Under-Counter Gourmet Ice Machine



Features

- 15" cabinet width
- Produces up to 65 lbs. of gourmet ice in 24 hours
- User-friendly control panel informs whether power is on, alerts a no-water condition, and time to clean reminder
- Uses less energy and water compared to 30 lb models
- Indoor & Outdoor rated
- Accepts custom wood panels to match existing cabinetry
- Lighted bin
- Concealed Door Hinge System
- Available with built-in drain pump
- Field reversible door

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
65 / 29	49 / 22.2	26 / 12



Control Board



Water Sensor



Scoop



• Units installed in elevations greater than 6,000 feet or 1,800 meters above sea level require an altitude adjustment to maintain proper ice level.



Gourmet Clear Ice




Gourmet Cube
1" x 1½" x 1¼"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for mixed drinks.

Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

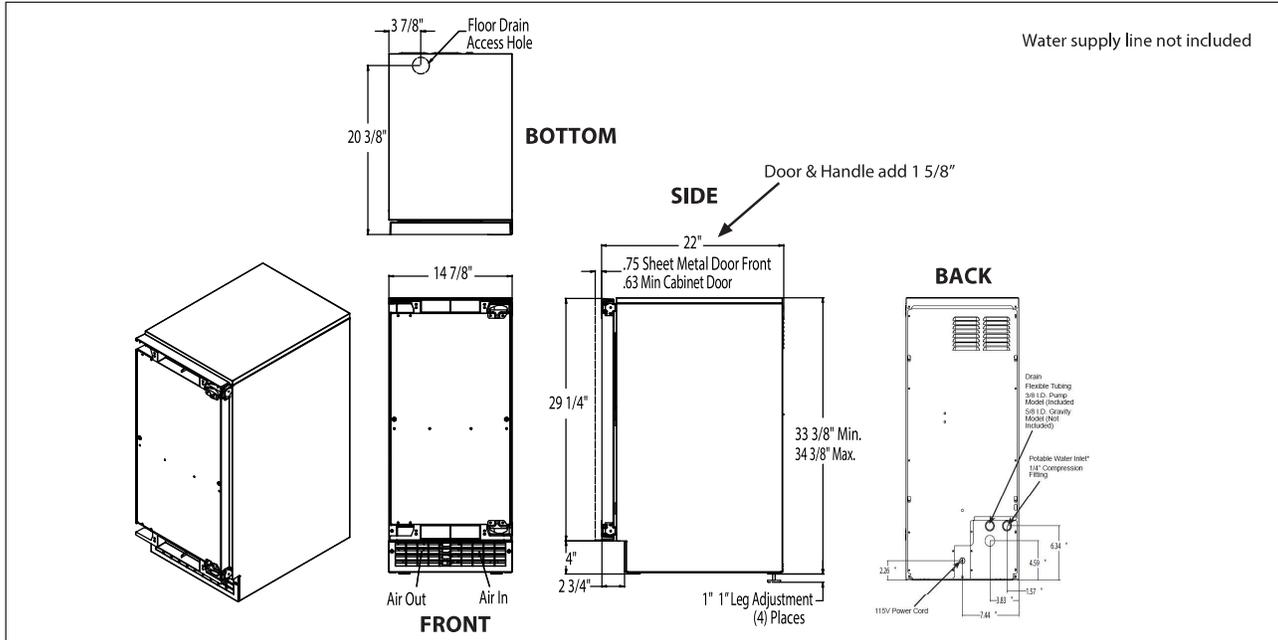

All Models

24 Hour Ice Production:
(70° Air/50° Water) 65 lb / 29 kg
(90° Air/70° Water) 49 lb / 22.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: 15a dedicated circuit required
(Volts/Hz/Phase) 115/60/1

Amps: 5

Maximum Fuze Size: 15

Refrigerant: R290

Dimensions (W x D x H):
Unit (without legs adjusted):
14.875" x 22" x 33.375"
(37.8 x 55.9 x 84.78 cm)

Shipping Carton:
18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
SRCG065A-ISU	Stainless Steel / Unfinished	Gravity	113 / 51
SRCP065A-ISU	Stainless Steel / Unfinished	Pump	118 / 54
SRCG065A-ISS	Stainless Steel / Stainless Steel	Gravity	122 / 55
SRCP065A-ISS	Stainless Steel / Stainless Steel	Pump	127 / 58

EXAMPLES OF GRAVITY DRAIN TUBE INSTALLATIONS

From Ice Machine To Drain

Normal Drain Line, Pitched Down From Ice Machine: Good Draining

With Trap, Causes Poor Draining: Poor Draining

With Trap And Vent, Draining Is Normal: Good Draining

SRCG: Gravity flow drain tube
SRCP: Built-in pump to expel drain water which includes 10' drain tube

Accessories

Model	Description	Shipping Weight lb / kg
KDFS	Stainless Steel Door Front Kit	12 / 5.5
KSSKP	Stainless Steel Kick Plate Cover	5 / 2.26
KATB	Anti-Tip Bracket Kit	2 / 0.9
KDFR	Retro-Fit Door Front Kit	8 / 3.6
19-0653	Clear One Concentrated Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for complete installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.

• 101 Corporate Woods Parkway, Vernon Hills, IL 60061 • 1-800-SCOTSMAN • www.scotsmanhomeice.com •